PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: A61F 2/06, A61B 17/11

(11) International Publication Number:

WO 00/12029

(43) International Publication Date:

9 March 2000 (09.03.00)

(21) International Application Number:

PCT/US99/19208

A1

(22) International Filing Date:

24 August 1999 (24.08.99)

(30) Priority Data:

09/141,284

27 August 1998 (27.08.98)

US

(71) Applicant: HEARTSTENT CORPORATION [US/US]; 651 Campus Drive, Saint Paul, MN 55112 (US).

(72) Inventors: TWEDEN, Katherine, S.; 1175 Ashley Lane, Mahtomedi, MN 55115 (US). VANNEY, Guy, P.; 9809 Tyler Street, Blaine, MN 55434 (US).


(74) Agent: DAIGNAULT, Ronald, A.; Merchant & Gould P.C. 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US).

(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: TRANSMYOCARDIAL IMPLANT

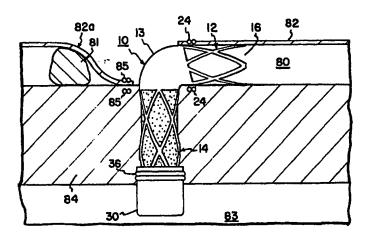

(57) Abstract

A transmyocardial implant establishes a blood flow path through a myocardium between a heart chamber and a lumen of a coronary vessel residing on an exterior of the heart. The implant (10) includes a coronary portion (12) sized to be received within the vessel. A myocardial portion (14) is sized to pass through the myocardium into the heart chamber. A transition portion (13) connects the coronary (12) and myocardial (14) portions for directing blood flow from the myocardial portion (14) to the coronary portion (12). The coronary portion (12) and the myocardial portion (14) have an open construction for permitting tissue growth across a wall thickness of the coronary portion (12) and the myocardial portion (14). The myocardial portion (14) includes an agent for controlling a coagulation cascade and platelet formation.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	ŲA	Ukraine
BR	Brazil	ΠL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	ľT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI.	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
ÇU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	u	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PCT/US99/19208

5

30

TRANSMYOCARDIAL IMPLANT

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention pertains to an implant for passing blood flow directly between a chamber of the heart and a coronary vessel. More particularly, this invention pertains to such an implant with an enhance design for promoting a healed layer of cells on an interior of the implant.

2. Description of the Prior Art

Commonly assigned U.S. Pat. No. 5,755,682 issued May 26, 1998 and 10 commonly assigned and co-pending U.S. Patent Application Serial No. 08/882,397 filed June 25, 1997, entitled "Method and Apparatus for Performing Coronary Bypass Surgery", and filed in the name of inventors Mark B. Knudson and William L. Giese (published as PCT International Application Publication No. WO 15 98/06356) both teach an implant for defining a blood flow conduit directly from a chamber of the heart to a lumen of a coronary vessel. In one embodiment, an Lshaped implant is received within a lumen of a coronary artery and passed through the myocardium to extend into the left ventricle of the heart. The conduit is rigid and remains open for blood flow to pass through the conduit during both systole and diastole. The conduit penetrates into the left ventricle in order to prevent tissue 20 growth and occlusions over an opening of the conduit. The '682 patent and '397 application also describe an embodiment where a portion of the implant passing through the heart wall is an open structural member lined by polyester (e.g., Dacron). A further embodiment discloses a portion of the implant in a coronary 25 vessel as being an open cell, balloon-expandable stent.

U.S. Pat. No. 5,429,144 to Wilk dated July 4, 1995 teaches implants which are passed through the vasculature in a collapsed state and expanded when placed in the myocardium so as not to extend into either the coronary artery or the left ventricle. The described implants close once per cycle of the heart (e.g., during diastole in the embodiment of Figs. 7A and 7B or during systole in the embodiment of Figs. 2A and 2B). Either of these two designs may be lined with a graft.

Commonly assigned and co-pending U.S. patent application Serial No. 08/944,313 filed October 6, 1997, entitled "Transmyocardial Implant", and filed in the name of inventors Katherine S. Tweden, Guy P. Vanney and Thomas L. Odland, teaches an implant such as that shown in the aforementioned '397 application and '682 patent with an enhanced fixation structure. The enhanced fixation structure includes a fabric surrounding at least a portion of the conduit to facilitate tissue growth on the exterior of the implant.

5

10

15

20

25

30

PCT International Application Publication No. WO 98/08456 describes a protrusive stent to form a passageway from the heart to a coronary vessel. The stent is described as wire mesh or other metal or polymeric material and may be self-expanding or pressure expandable. The application describes the stent may be covered by a partial or complete tubular covering of material including polyester, woven polyester, polytetraflouroethylene, expanded polytetraflouroethylene, polytetraflouroethylene, autologous tissue and xenograft tissue.

Biocompatibility is an important design feature. Solid metal implants are formed of material (e.g., titanium or pyrolytic carbon) with low incidents of thrombus and platelet activation. While such materials are proven in use in a wide variety of products (e.g., heart valve components), they do not facilitate full healing. By "healing", it is meant that over time, the patient's cells grow over the material of the implant so that blood flowing through the implant is exposed only (or at least primarily) to the patient's cells rather than to a foreign material.

SUMMARY OF THE INVENTION

According to a preferred embodiment of the present invention, a transmyocardial implant is disclosed for establishing a blood flow path through a myocardium between a heart chamber and a lumen of a coronary vessel residing on an exterior of the heart. The implant includes a coronary portion sized to be received with the vessel. A myocardial portion is sized to pass through the myocardium into the heart chamber. A transition portion connects the coronary and myocardial portions for directing blood flow from the myocardial portion and into the coronary portion. The coronary portion and the myocardial portion have an open construction

for permitting tissue growth across a wall thickness of the coronary portion and the myocardial portion. The myocardial portion includes an agent for controlling the coagulation cascade and platelet activation, and promoting healing.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side-elevation view of a transmyocardial implant according to the present invention shown in place defining a blood flow path from a left ventricle to a coronary artery;

Fig. 2 is a cross-sectional view of the implant of Fig. 1;

10

15

20

25

Fig. 3 is a view of an alternative embodiment of the implant of Fig. 1 illustrating a portion of the implant expandable within a coronary artery;

Fig. 4 is a view similar to Fig. 3 showing a transition portion of open cell construction;

Fig. 5 is a side section view of an alternative embodiment of Fig. 3 showing a balloon catheter admitted into the implant through an access port; and

Fig. 6 is a side sectional view of an expandable implant with a balloon catheter removable through a myocardial portion of the catheter.

DESCRIPTION OF THE PREFERRED EMBODIMENT

With initial reference to FIG. 1, a conduit 10 is shown in the form of an L-shaped tube. The conduit 10 may be formed of titanium or other biocompatible material. The material of the conduit 10 is preferably radially rigid material in order to withstand contraction forces of the myocardium. By way of non-limiting example, the tube will have an outside diameter D_0 of about 3 millimeters and an internal diameter D_1 of about 2.5 millimeters to provide a wall thickness of about .25 millimeters.

The tube 10 has a coronary portion 12 sized to be received within the lumen of a coronary vessel such as the lumen 80 of a coronary artery 82 distal to an obstruction 81 as illustrated in Fig. 1. The conduit 10 has a myocardial portion 14 extending at a right angle to the axis of portion 12. The myocardial portion 14 is

sized to extend from the coronary artery 82 directly through the myocardium 84 and protrude into the left ventricle 83 of a patient's heart.

The coronary portion 12 has a first opening 16. The myocardial portion 14 has a second opening 18 in communication with an interior 20 of the implant 10. Therefore, blood can freely flow through the implant 10 between the left ventricle 83 and the lumen 80 of the coronary artery 82. Blood flows axially out of opening 16 parallel with the axis of lumen 80.

5

10

15

20

25

30

The longitudinal axis of the coronary portion 12 is aligned with the axis of the lumen 80. Sutures 24 secure the artery 82 to the coronary portion 12. The proximal portion 82a of the coronary artery is ligated by sutures 85.

The coronary and myocardial portions 12, 14 have an open lattice construction 12a, 14a to define a plurality of open cells 12b, 14b extending through the wall thickness of the implant 10. Preferably, the coronary and myocardial portions 12, 14 are joined by a transition portion 13 in a 90° bend between portions 12, 14. While transition portion 13 can have an open lattice construction as portions 12, 14, transition portion 13 will preferably have smaller open areas in such an open construction or, as illustrated, will be of solid construction. Such construction permits the transition portion to deflect high velocity blood flows from the myocardial portion 14 into the coronary portion 12. A lattice construction with large open cells in the transition portion could result in the high velocity flow damaging tissue (not shown) overlying the transition portion.

Any one or all of the coronary portion 12, transition portion 13 and myocardial portion 14 could be formed in final size as rigid units or could be formed in small diameter sizes which are subsequently expanded to full size. For example, Fig. 3 illustrates a coronary portion 12' which is formed tapering from the transition portion 13' to a reduced diameter open end 16'. The taper permits ease of insertion into a coronary artery. Following such insertion, the tapered coronary portion 12' may be expanded to full size illustrated by the phantom lines in Fig. 3. Such expansion can be performed using balloon-tipped catheters as is conventional in stent angioplasty. A collapsed and subsequently expanded implant 10 where all portions 12, 13 and 14 are expanded can permit use as a percutaneously deployed implant. The present drawings illustrate a presently preferred surgically deployed

implant. In the surgical application, the artery 82 is ligated. The implant 10 is passed through the epicardium and myocardium on a side of the artery 82.

5

10

15

20

25

30

Fig. 5 illustrates a balloon 100 placed in a tapered coronary portion 12. A lead 102 from the balloon 100 is passed through an opening 113' in the transition portion 13'. The opening 113' can be closed with a plug 115' after the balloon 100 and lead 102 are withdrawn through the opening 113'. Alternatively, in a transition portion 13" with open cell construction (Fig. 4), the balloon lead can be passed through the openings of the transition portion 113". Fig. 6 illustrates passing the lead 102 through opening 18 of the myocardial portion. The lead 102 can be pulled upwardly from the exterior of the heart to remove the balloon 100. Alternatively, the lead 102 can be pulled through a catheter (not shown) adjacent end 18 in the left ventricle.

In either percutaneous or surgical implants, a flexible transition portion 13 (as would be achieved with a stent lattice construction) permits relative articulation between the coronary and myocardial portions 12, 14 to ensure the coronary portion is axially aligned with the lumen 80. Absent such articulation, such axial alignment is achieved by accurately controlling the position of the myocardial portion 14 such that the coronary portion 12 is axially aligned with the lumen 80 following implantation.

The open cell construction of the coronary and myocardial portions 12, 14 permit tissue growth through the open cells 12c, 14c following implant. The healing procedure in the coronary portion 12 is the same as that in coronary stents. Vascular endothelial cells grow over to coat the structural material 12a of portion 12.

In portion 14, myocardial tissue, if not obstructed, will grow through the cells 14c. Furthermore, the myocardium is highly thrombogenic. Therefore, uncontrolled contact between the myocardium 82 and the implant interior 20 can result in thrombosis of the implant 10. Further, it is believed that the epicardium (i.e., outer layer of the myocardium) has a greater density of myocardial growth cells which contribute to healing.

To control growth in the myocardial portion 14, a liner 30 is provided in the myocardial portion 14. The liner 30 is any porous material for accepting tissue growth and, preferably, is a polyester fabric (e.g., Dacron). The porous liner 30 has

interstial spaces smaller than the open cells 12c, 14c. The liner 30 is shown on an interior of the myocardial portion 14 but could also or alternatively surround the exterior.

The liner 30 has an upper end 32 secured through any suitable means (e.g., sutures not shown) to the upper end of the myocardial portion 14. A lower end 34 is folded over the opening of the myocardial portion 14 and secured to the exterior of the portion 14 by sutures 36. The myocardial portion 14 is sized to protrude into the left ventricle 83 with only the folded over liner material exposed to the interior of the left ventricle 83.

5

15

30

The liner 30 acts as a porous substrate into which tissue may grow. To prevent thrombus, the liner 30 is impregnated with an agent for controlling coagulation cascade and platelet activation and adhesion. An example of such an agent is heparin but could be any anticoagulant or anti-platelet. Also, an agent such as a basic fibroblast growth factor could be used to accelerate healing.

The agent permits structural cells to grow on the liner by limiting thrombus formation which, uncontrolled, would occlude the implant. Due to the open construction, the structural, healing cells of the epicardium can grow onto the liner. Subsequently, endothelial cells can grow on the structural cells.

Therefore, the structure described promotes a three-stage healing process:

- the drug agents control healing by minimizing coagulation and
 platelet activation which would otherwise be stimulated by agents from
 the myocardium; and
 - structural cells grow into and on the liner 30 now lined with the thrombus to initially heal and form a vascular bed; and
- endothelial cells grow over the structural cells.

In the transition portion 13, an open cells structure will permit tissue growth as in the coronary portion 12. Such growth may also occur in the solid construction. Alternatively, the liner 30 can be extended into the transition portion 13. Additionally, the open cell structure in the transition portion 13 can permit articulation between the coronary portion and the myocardial portion. Such a structure is shown in Fig. 4. The open transition portion 13" is formed by a coil 13a" between the coronary portion 12" and the myocardial portion 14". This

structure permits bending at the transition portion. As a result, the coronary portion can be axially aligned in the artery without first accurately positioning the myocardial portion.

5

10

15

Having disclosed the present invention in a preferred embodiment, it will be appreciated that modifications and equivalents may occur to one of ordinary skill in the art having the benefits of the teachings of the present invention. It is intended that such modifications shall be included within the scope of the claims appended hereto. For example, the liner 30 can take many constructions including PTFE, expanded-PTFE, polyurethane, polypropylene or any biologically compatible paving material or natural tissue. Further, restenosis of the coronary portion 12 can be prevented with radioactivity therapy (such as providing the coronary portion with a short half-life beta emitter). Also, the liner 30 may be either a resorbable or non-resorbable material. Genetically engineered cells can be transformed to secrete anticoagulants and other agents to keep the blood fluid (such as tissue plasminogen activator and smooth muscle cells altered to express nitric acid).

5

10

15

30

WHAT IS CLAIMED:

- 1. A transmyocardial implant for defining a blood flow pathway directly from a left ventricle to a coronary vessel, the implant comprising:
- a coronary portion sized to be received within the vessel;
 - a myocardial portion sized to pass through the myocardium into the left ventricle;
 - a transition portion connecting the coronary and myocardial portion for directing blood flow from the myocardial portion to the coronary portion;
- at least the coronary portion and the myocardial portion having an open construction for permitting tissue growth across a wall thickness of the coronary portion and the myocardial portion; and
 - at least the myocardial portion including an agent for controlling a coagulation cascade and platelet activation.
- An implant according to claim 1 further comprising an agent for encouraging healing.
- 3. An implant according to claim 1 further comprising a porous lining in at least the
 20 myocardial portion with the porous lining have pores smaller than openings of the open construction of the myocardial portion.
 - 4. An implant according to claim 1 wherein the porous lining contains the agent.
- 25 5. An implant according to claim 1 wherein the agent is heparin.
 - 6. An implant according to claim 1 wherein the agent is an anti-coagulant.
 - 7. An implant according to claim 1 wherein the agent is an anti-platelet.
 - 8. An implant according to claim 2 wherein the agent for encouraging healing is a growth factor.

9. An implant according to claim 1 wherein the coronary portion is expandable from a first diameter to an enlarged second diameter.

- 5 10. An implant according to claim 1 wherein the myocardial portion is expandable from a first diameter to an enlarged second diameter.
 - 11. An implant according to claim 1 wherein the transition portion permits articulation between the coronary portion and the myocardial portion.

10

- 12. A transmyocardial implant for defining a blood flow pathway directly from a left ventricle to a coronary vessel, the implant comprising:
 - a coronary portion sized to be received within the vessel;
- a myocardial portion sized to pass through the myocardium into the left ventricle;
 - a transition portion connecting the coronary and myocardial portion for directing blood flow from the myocardial portion to the coronary portion; and the myocardial portion including a construction to facilitate tissue integration and including an agent for controlling a coagulation cascade and
 - platelet activation.

prateret aen vauen.

13. An implant according to claim 12 wherein the coronary portion includes an open structure to facilitate growth of vascular endothelial cells along the coronary portion.


25


20


- 14. An implant according to claim 12 wherein the myocardial portion includes a porous structure for facilitating growth of vascular endothelial cells into the myocardial portion.
- 30 15. An implant according to claim 14 wherein the porous structure includes a fabric liner.


16. An implant according to claim 14 wherein the myocardial portion further includes a wall structure for facilitating growth of structural cells into the interior of the myocardial portion.


5 17. An implant according to claim 16 wherein the wall structure is an open cell construction of the myocardial portion.

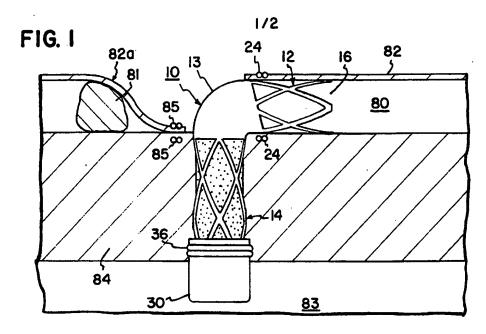

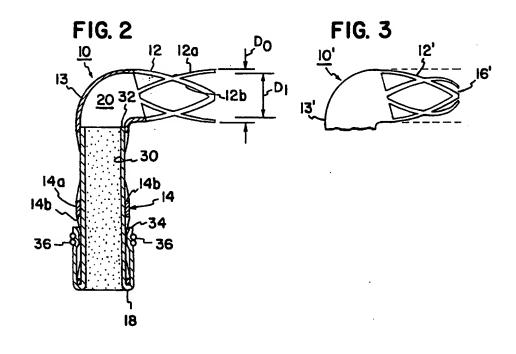







INTERNATIONAL SEARCH REPORT

International Application No PCT/US 99/19208

•			101/03 33/13500
A CLASSI IPC 7	IFICATION OF SUBJECT MATTER A61F2/06 A61B17/11		
According to	o international Patent Classification (IPC) or to both national class	ification and IPC	
	SEARCHED		
Minimum do IPC 7	ocumentation searched (classification system followed by classific A61F A61B	ation symbols)	
Documentar	tion searched other than minimum documentation to the extent the	at euch documents are includ	ed in the fields searched
Electronic d	ata base consulted during the international search (name of data	base and, where practical, a	eerch terme used)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the	relevant passages	Relevant to claim No.
P,Y	WO 99 17683 A (HEARTSTENT CORP) 15 April 1999 (1999-04-15) page 3, line 3 - line 28; figure page 4, line 30 -page 5, line 2		1,2,4-7,
Y	US 5 693 085 A (BURMEISTER PAUL 2 December 1997 (1997-12-02) column 5, line 30 -column 6, li figures column 9, line 40 - line 63	•	1,2,4-7, 12
A	WO 98 08456 A (TRANSVASCULAR IN 5 March 1998 (1998-03-05) cited in the application page 30, line 35 -page 33, line figures 8A-8C	•	1,9-12
		-/	
!			
X Furt	her documents are listed in the continuation of box C.	Patent family m	embers are listed in annex.
• Special ca	degories of cited documents:	T later document public	ined after the International filing date
"A" docume coneid	ent defining the general state of the art which is not lered to be of particular relevance	or priority date and a cited to understand invention	not in conflict with the explication but the principle or theory underlying the
filing d		"X" document of particular carnot be consider	ar relevance; the claimed invention od novel or carmot be considered to
which citation	ent which may throw doubts on priority claim(e) or le cited to establish the publication date of another n or other special reason (as specified) ent referring to an oral disclosure, use, exhibition or means	"Y" document of particular cannot be considered document is combined."	etep when the document le taken atone ar relevance; the claimed invention at to involve an inventive step when the led with one or more other such docu— lation being obvious to a person aldilled
	ent published prior to the international fling date but han the priority date claimed	In the art. "&" document member o	
Date of the	actual completion of the international search	Date of mailing of th	e international search report
8	December 1999	11/01/20	00
Name and r	mailing address of the ISA European Patent Office, P.B. 6818 Patentiaan 2	Authorized officer	
	NL - 2280 HV Rijewijk Tel. (+31-70) 340-2040, Tx. 31 651 epo ni, Fax: (+31-70) 340-3018	Neumann,	E

1

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/19208

(Cambri	POOLINGS OF THE POOLINGS OF TH	PCT/US 99/19208
	ation) DOCUMENTS CONSIDERED TO BE RELEVANT	
tegory *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
\	WO 98 16172 A (FOUERE ALAIN) 23 April 1998 (1998-04-23) claim 1; figures	1,9-12
	WO 97 47651 A (NOVONORDISK AS ;ZYMOGENETICS INC (US)) 18 December 1997 (1997-12-18) page 23, line 16 - line 21	·

INTERNATIONAL SEARCH REPORT

Information on patent family members

Immenational Application No PCT/US 99/19208

	itent document I in search repor	t	Publication date		Patent family member(s)	Publication date
WO	9917683	Α	15-04-1999	AU	9028398 A	27-04-1999
US	5693085	Α	02-12-1997	ΕP	0754017 A	22-01-1997
				JP	10503663 T	07-04-1998
				WO	9529647 A	09-11-1995
				EP	0746375 A	11-12-1996
				JP	9503945 T	22-04-1997
				WO	9511055 A	27-04-1995
WO	9808456	Α	05-03-1998	AU	4234097 A	19-03-1998
WO	9816172	Α	23-04-1998	AU	7304296 A	11-05-1998
				EP	0868155 A	07-10-1998
WO	9747651	A	18-12-1997	US	5833982 A	10-11-1998
				AU	3090697 A	07-01-1998
				CN	1221427 A	30-06-1999
				CZ	9803946 A	14-04-1999
				EP	0910580 A	28-04-1999
				NO	985668 A	04-02-1999
				PL	330365 A	10-05-1999

THIS PAGE BLANK (USPTO)